




## Installation Instructions Auto Climate Monitor Model DP-1001

The Auto Climate Monitor (ACM) must be mounted vertically, with the cable and connector at the bottom of the unit.

The ACM Must Not be mounted horizontally.

Place the ACM in a position where it will not be exposed to direct sunlight, or where airflow from the Dyno cooling fans can blow directly onto the ACM.

The ACM should be mounted approximately 0.8 meters to 1.4 meters above floor level. (At an approximate level of the engine intake system)

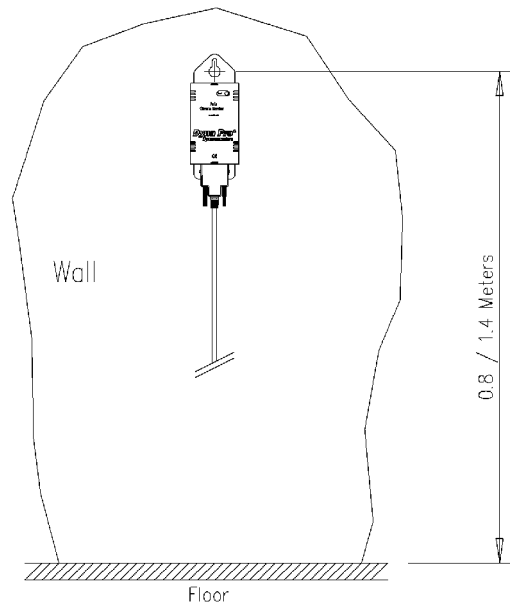

Connect one end of the interface cable to the ACM Module, and the other end to the MPU 3000-20-2 Control Unit on the front of the Dynamometer, Labelled as 'Atmospheric Monitor'.

Try to keep the interface cable away from Mains power cables and strong sources of electrical noise.

**DO NOT extend the interface cable.  
Only use interface cables supplied by Dyna Pro Dynamometers Ltd.**

Dyna Pro Dynamometers Ltd reserves the right to change specifications without notice.

© 2011 Dyna Pro Dynamometers Ltd. All rights reserved.

[www.dynapro.co.uk](http://www.dynapro.co.uk)

Dyna Pro Dynamometers Ltd United Kingdom

Tel UK: +44 (0) 8000 4321 68

Tel Int: +44 (0) 1256 363063

E-mail [support@dynapro.co.uk](mailto:support@dynapro.co.uk)